





Ind. b - Revision : 12-2004

## 2VGR15 200A P/N B22-D0


Substitute for Z21-12



| Voltage | Frequency | Input power | Current | Capacitor | Airflow | Speed rotation | Noise level | Rotation direction | Operating temperature |
|---------|-----------|-------------|---------|-----------|---------|----------------|-------------|--------------------|-----------------------|
| V       | Hz        | Wa          | A       | µF        | m³/h    | RPM            | dBA         | ↻                  | Min / Max             |
| 230     | 50        | 70          | 0,31    | 2,0       | 950     | 2 485          | 63          | L                  | -20°C / +70°C         |
| 230     | 60        | 85          | 0,37    | 2,0       | 1 045   | 2 710          | 66          | L                  | -20°C / +70°C         |

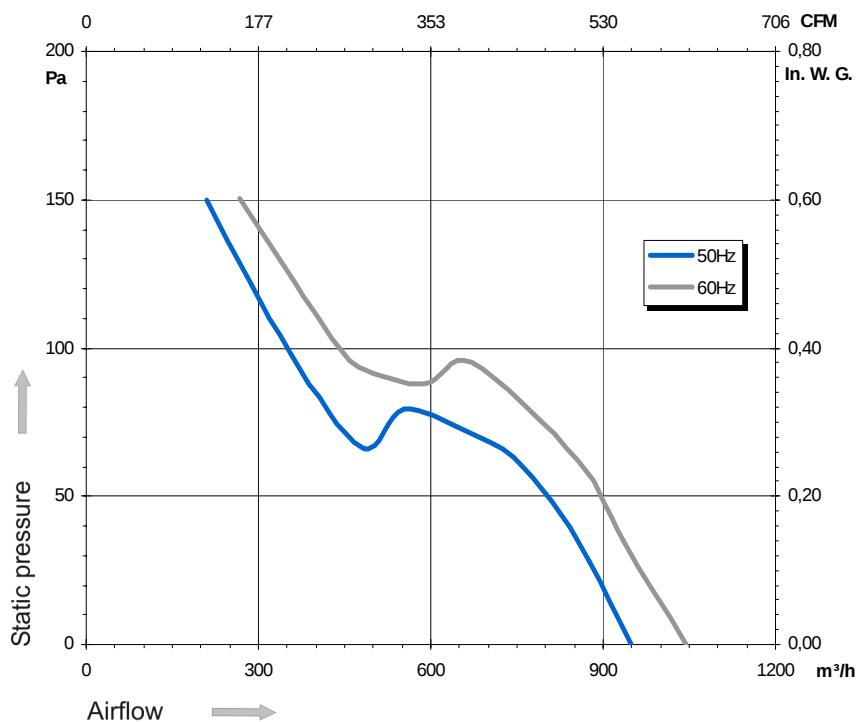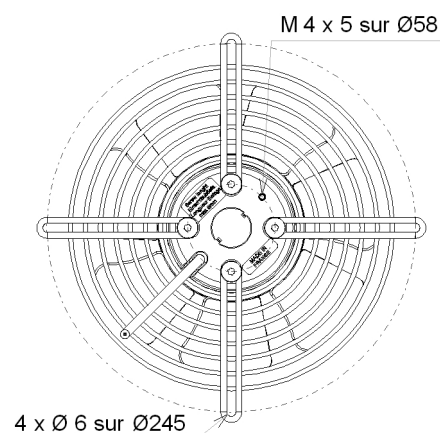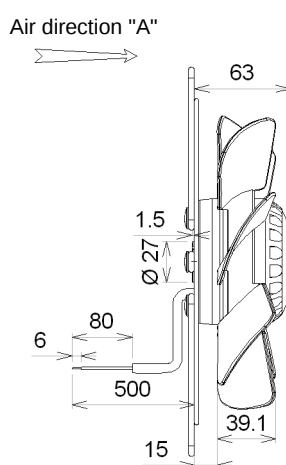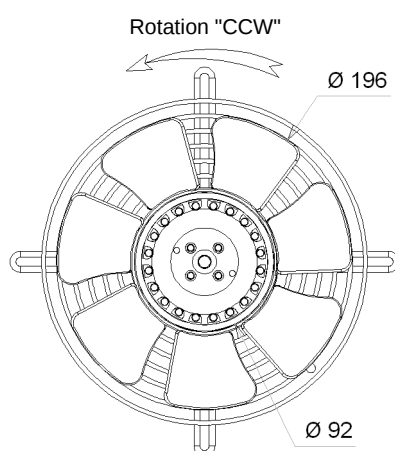

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G6.3 balancing
- Plastic impeller
- Rotor : black paint
- Finger guard : black paint

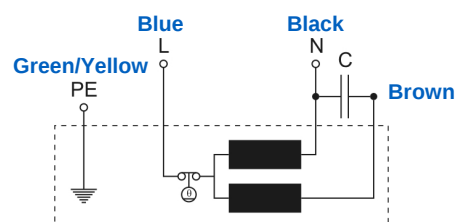

| Capacitor for 50Hz | Capacitor for 60Hz | Connecting box | Connector |
|--------------------|--------------------|----------------|-----------|
| 19008-0            | 19008-0            | 39658          | 09145-0   |

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.