

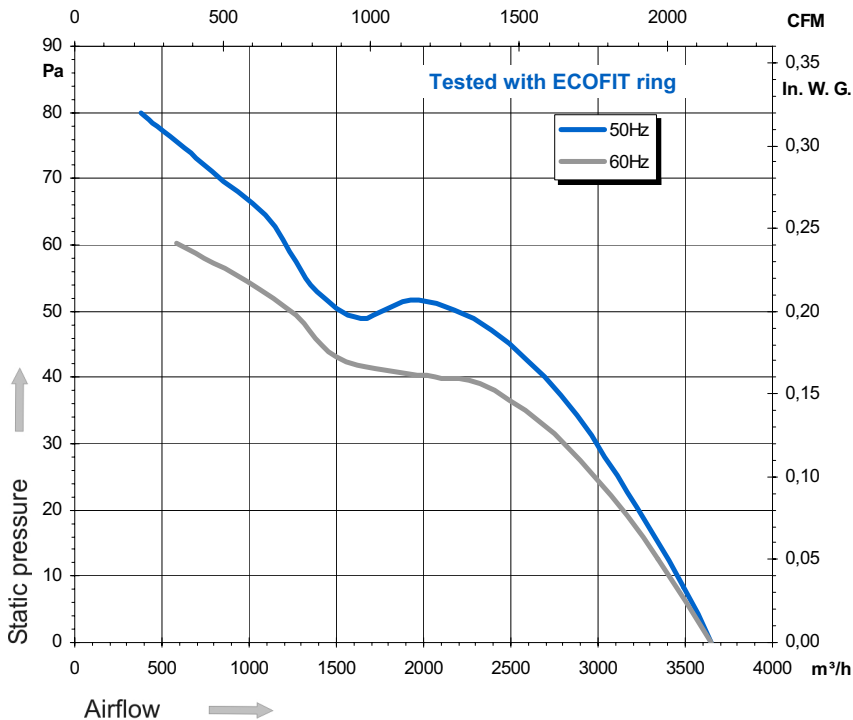
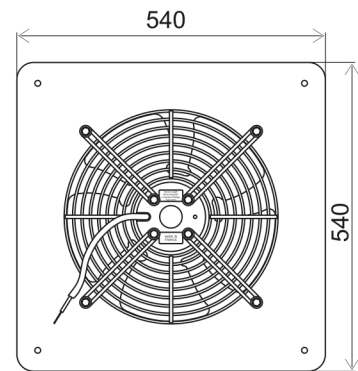


Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA		Min / Max
230	50	151	0,66	4,0	3 650	1 165	69	R	-20°C / +50°C
230	60	177	0,77	3,5	3 650	1 130	71	R	-20°C / +60°C

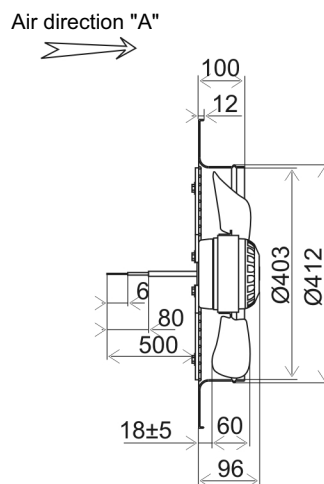

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G6.3 balancing
- Zinc coated impeller
- Rotor and impeller : black paint
- Finger guard and ring : black paint

Capacitor for 50Hz: 19019-0
 Capacitor for 60Hz: 19049-0
 Connecting box: 39658
 Connector: 09145-0

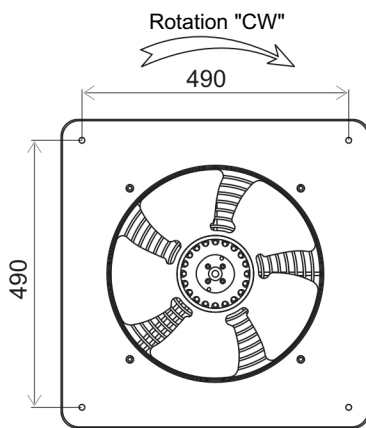