

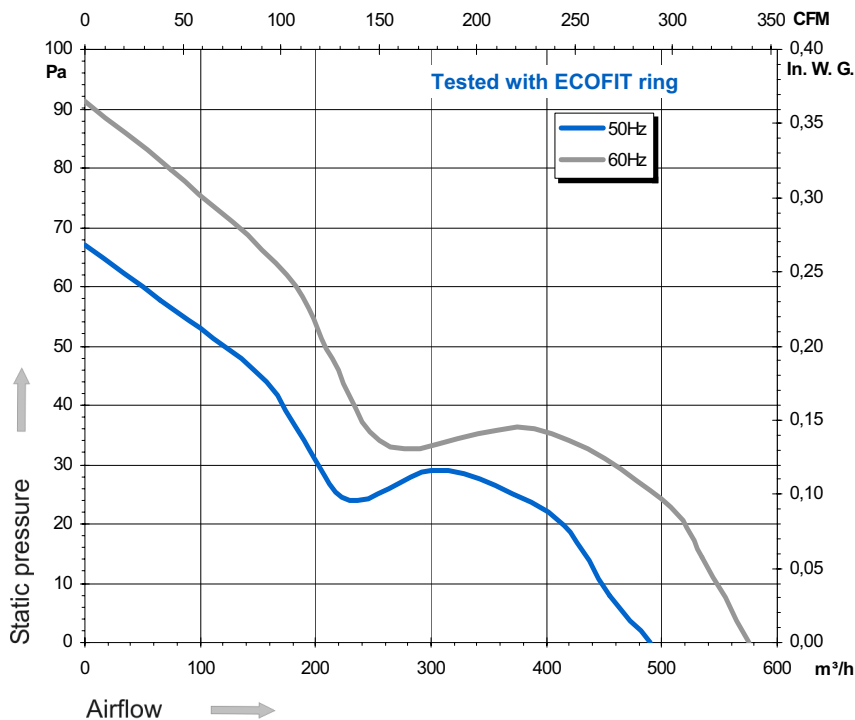
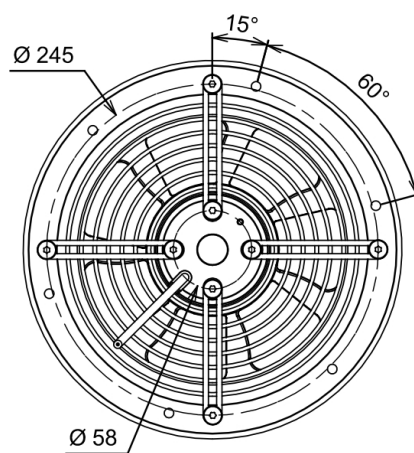


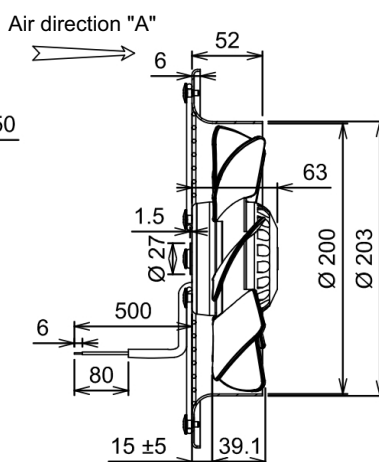

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	μF	m³/h	RPM	dBA		Min / Max
230	50	31	0,14	1,5	490	1 380	50	L	-20°C / +70°C
230	60	32	0,14	1,5	575	1 630	53	L	-20°C / +70°C

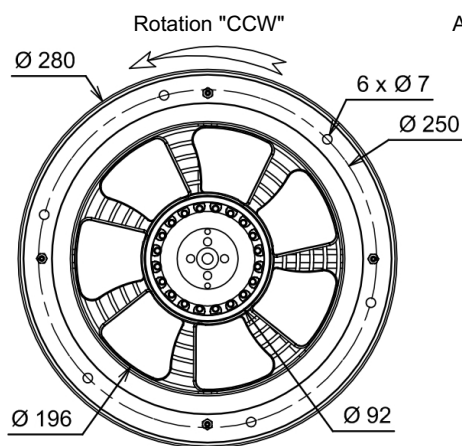

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G6.3 balancing
- Plastic impeller
- Rotor : black paint
- Finger guard and ring : black paint

Capacitor for 50Hz: 19005-0
 Capacitor for 60Hz: 19005-0
 Connecting box: 39658
 Connector: 09145-0

