
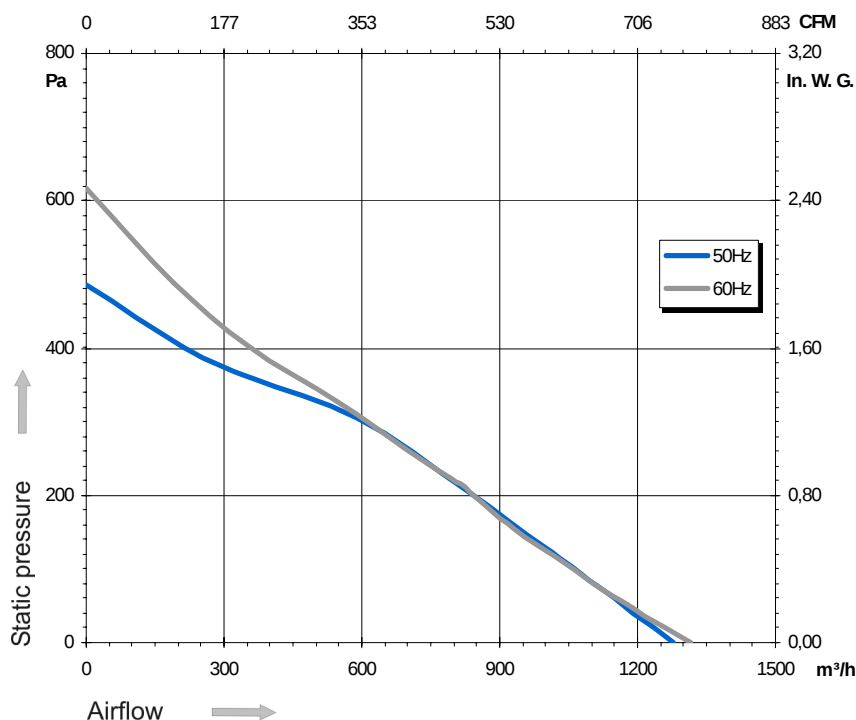
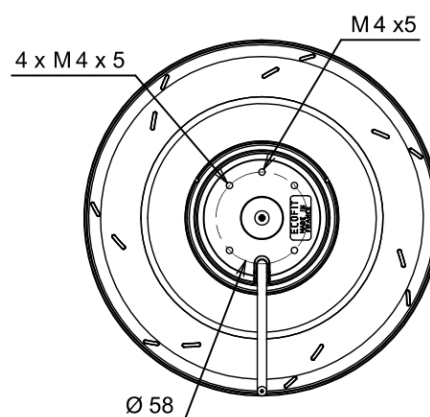
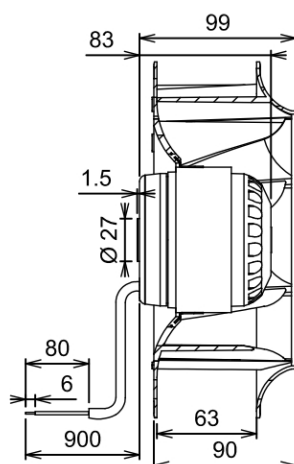



Ind. 0 - Revision : 11-2003

2RREu35 225x63R P/N C25-A4

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	158	0,69	4,0	1 280	2 535	70	R	-40°C / +70°C
230	60	213	0,93	4,0	1 315	2 590	70	R	-40°C / +60°C

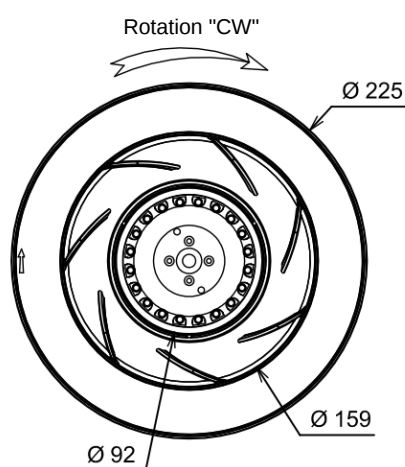

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Rotor : black paint
- PA 6/6 UL 94 V-0 plastic impeller
- UL approved motor

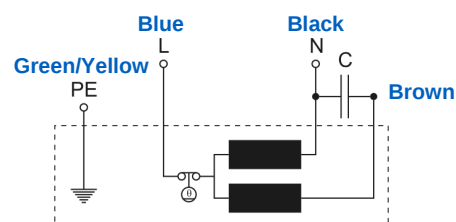

Capacitor for 50Hz 19220-a
 Capacitor for 60Hz 19220-a
 Zinc Coated 21194-a
 Inlet cone 16133-a

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.