






Ind. 0 - Revision : 11-2003

4RRE25 225x63R P/N B28-A0


Substitute for Z19-01

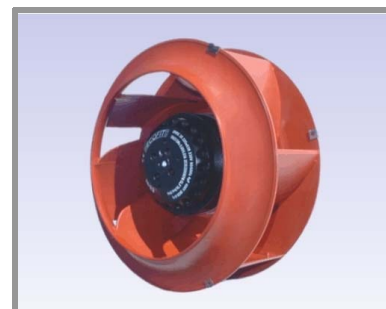

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	50	0,23	1,5	740	1 400	56	R	-20°C / +70°C
230	60	56	0,26	1,5	860	1 635	59	R	-20°C / +70°C

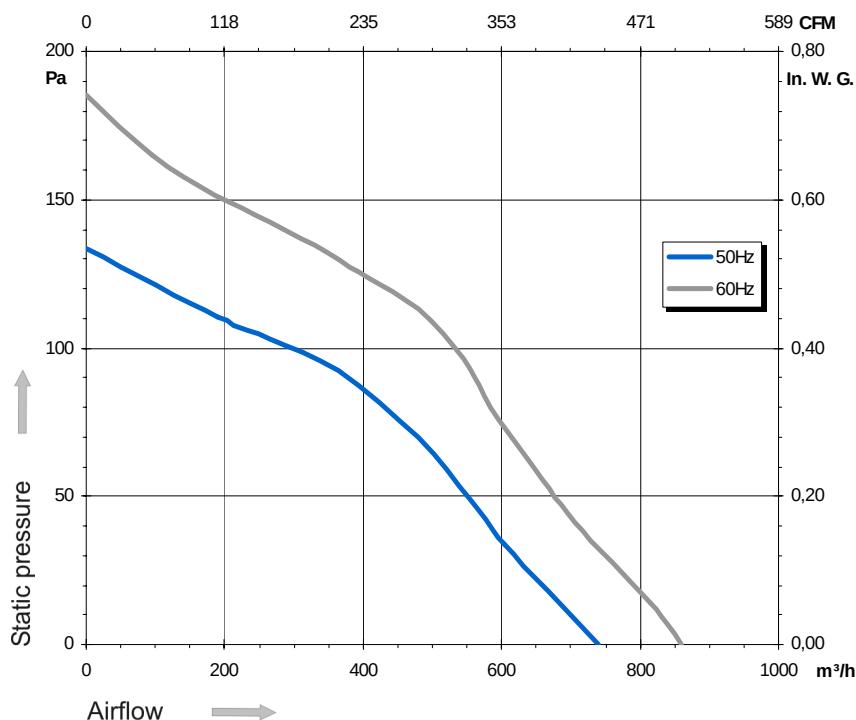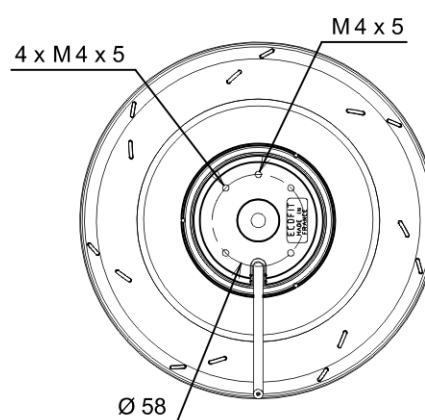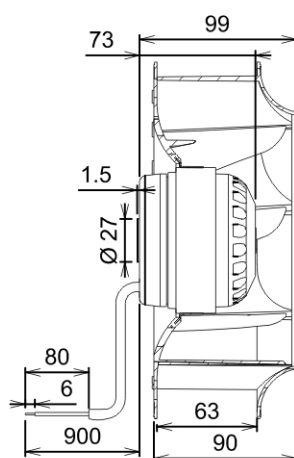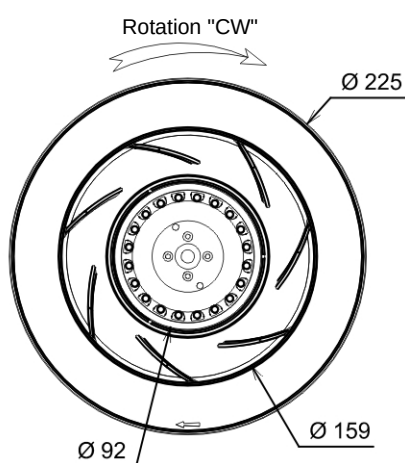

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Rotor : black paint
- PA 6/6 UL 94 V-0 plastic impeller

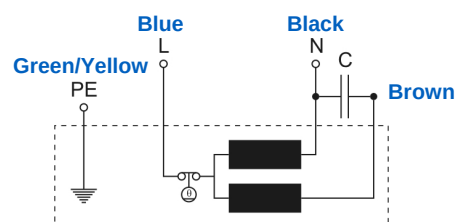

Capacitor for 50Hz	Capacitor for 60Hz	Zinc Coated	Inlet cone
19005-0	19005-0	21194-a	16133-a

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.