




Ind. d - Revision : 01-2004

4RRE35 280x90R

P/N Z19-04




Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	104	0,47	3,0	1 540	1 200	53	R	-20°C / +60°C
230	60	113	0,52	2,5	1 535	1 185	53	R	-20°C / +60°C

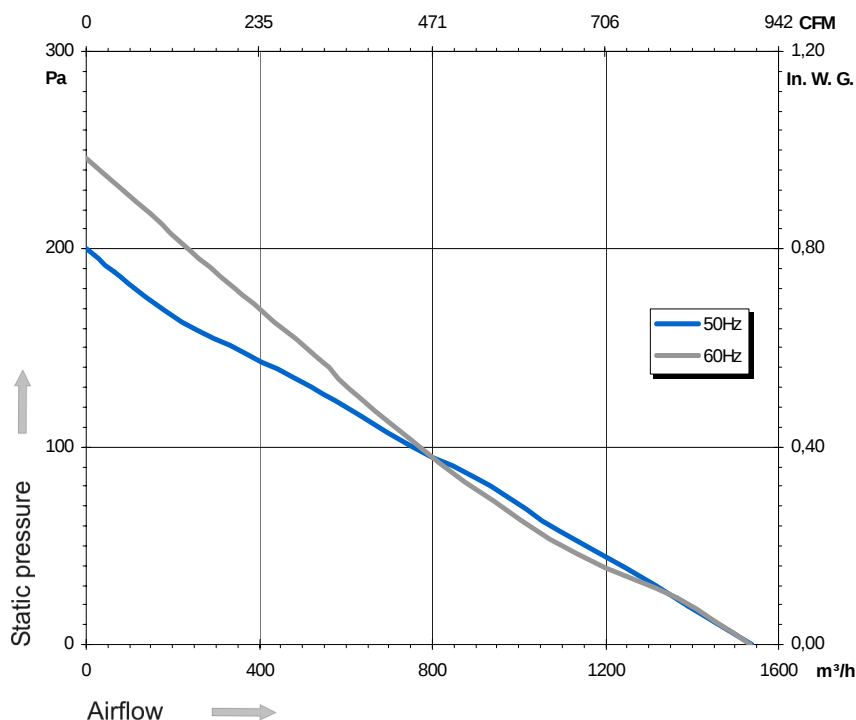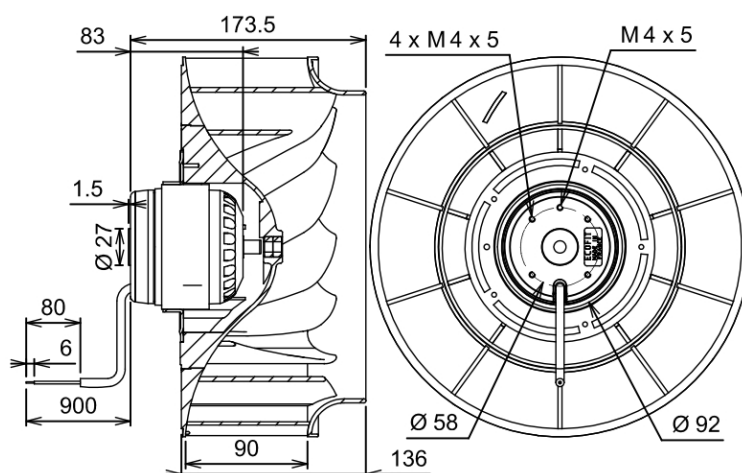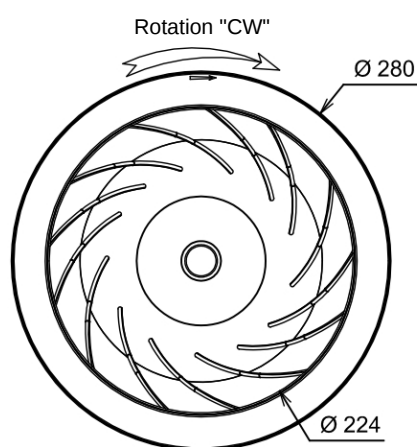

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Rotor : black paint
- ABS plastic impeller

Capacitor for 50Hz: 19012-0
Capacitor for 60Hz: 19011-0

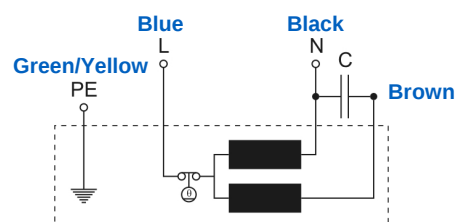

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.