
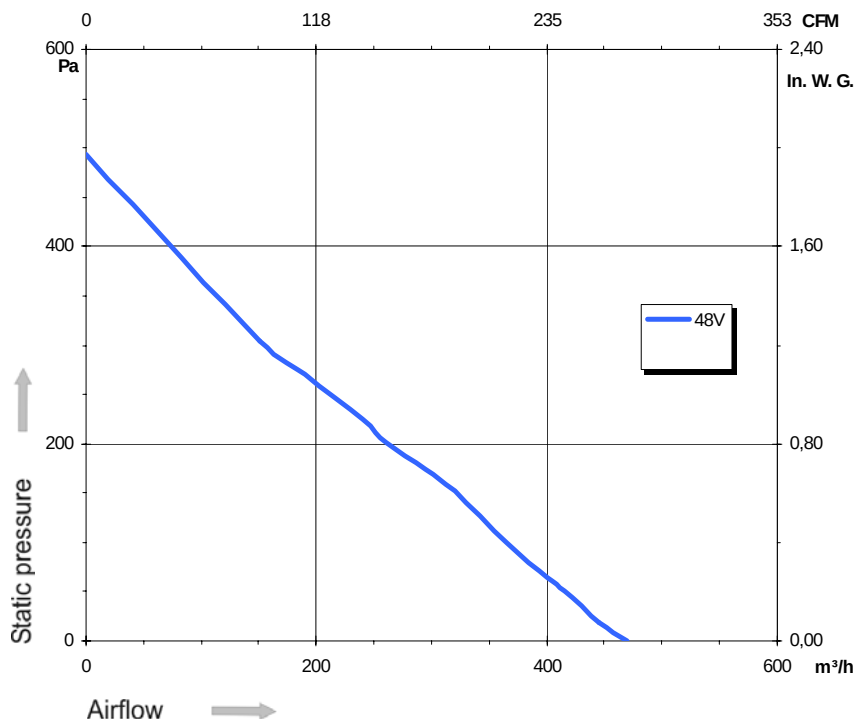
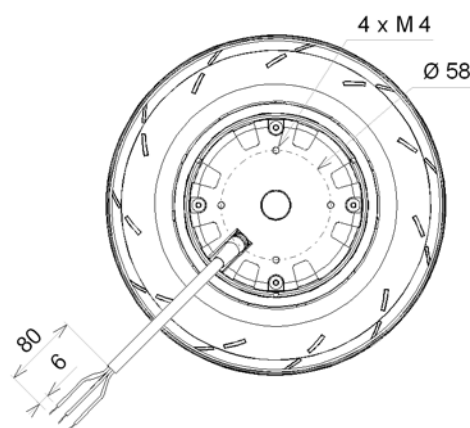
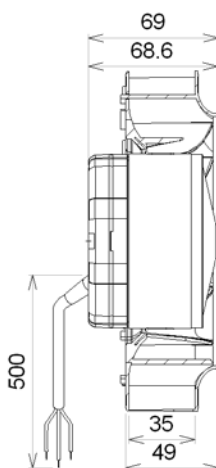


Ind. a - Revision : 05-2005

RRE48 180x35R

P/N Z48-04

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	μF	m³/h	RPM	dBA	↻	Min / Max
48	-	53	1,10	-	470	3 050	65	R	-20°C / +70°C

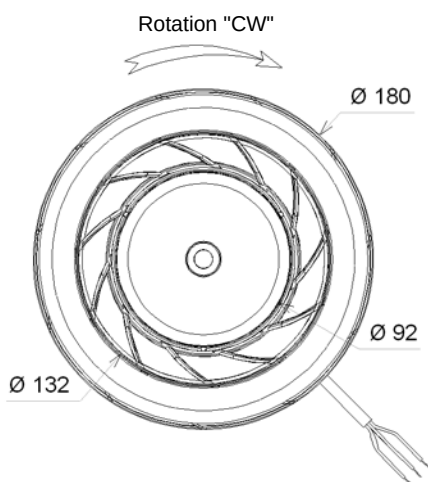


- Nominal voltage 48VDC (36-60VDC)
- Reverse polarity protection
- Soft start
- Locked rotor protection
- Tachometer output (open collector)
- Controlled by 0-10VDC or PWM signal
- IP44 protection

Zinc Coated Inlet cone

21181-a

16043-a

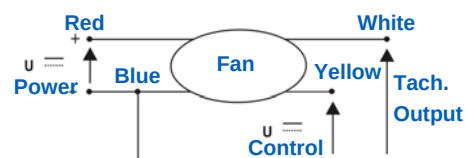

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.