





Ind. 0 - Revision : 07-2004


2GDSu15 120x126L P/N D06-A0



| Voltage | Frequency | Input power | Current | Capacitor | Airflow | Speed rotation | Noise level | Rotation direction | Operating temperature |
|---------|-----------|-------------|---------|-----------|---------|----------------|-------------|--------------------|-----------------------|
| V | Hz | Wa | A | µF | m³/h | RPM | dBA | ↻ | Min / Max |
| 230 | 50 | 100 | 0,47 | 2,5 | 385 | 1 640 | 51 | L | -40°C / +70°C |
| 230 | 60 | 110 | 0,53 | 2,5 | 355 | 1 590 | 50 | L | -40°C / +70°C |

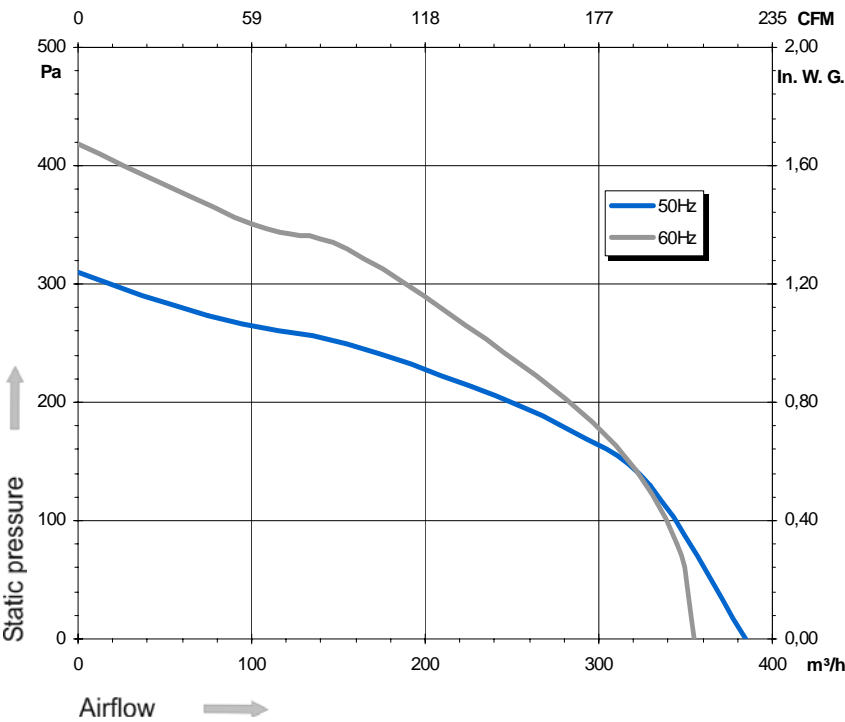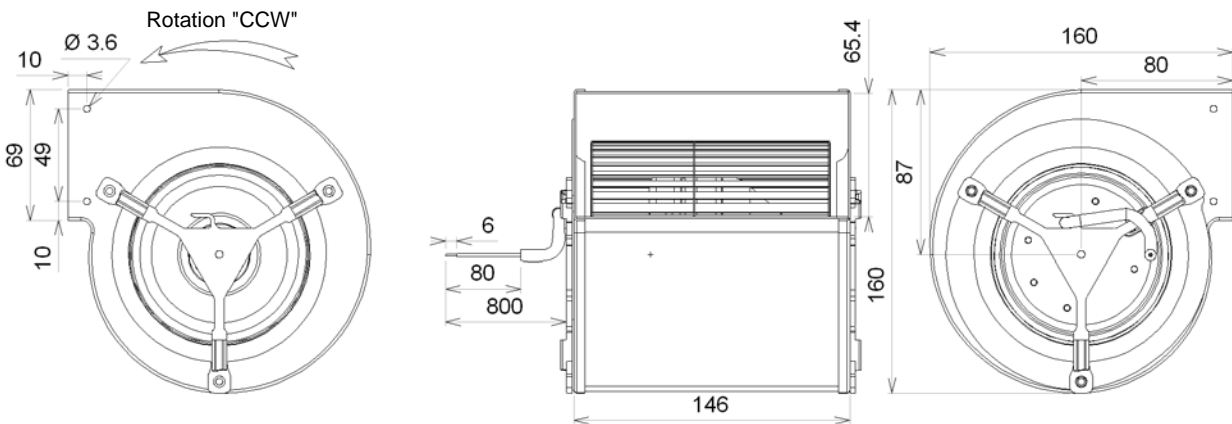

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Scroll housing : black paint
- Galvanized steel impeller
- UL approved motor

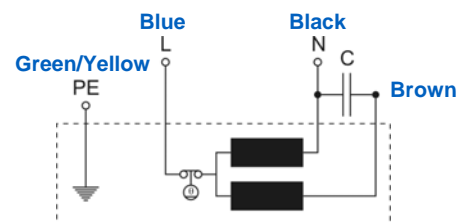

| Capacitor for 50Hz | Capacitor for 60Hz | Zinc Coated |
|--------------------|--------------------|-------------|
| 19218-0 | 19218-0 | 21237-a |

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.