



Ind. 0 - Revision : 04-2005


2GDSu25 133x190R P/N C50-B3

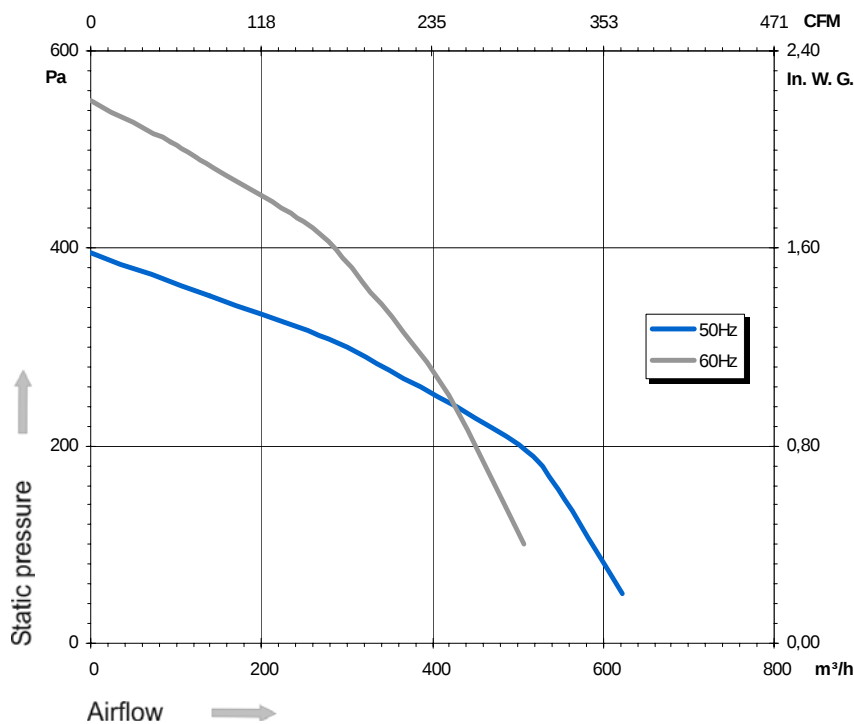

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
115	50	200	1,74	14,0	625	1 525	51	R	-40°C / +50°C
115	60	203	1,77	14,0	510	1 760	53	R	-40°C / +50°C

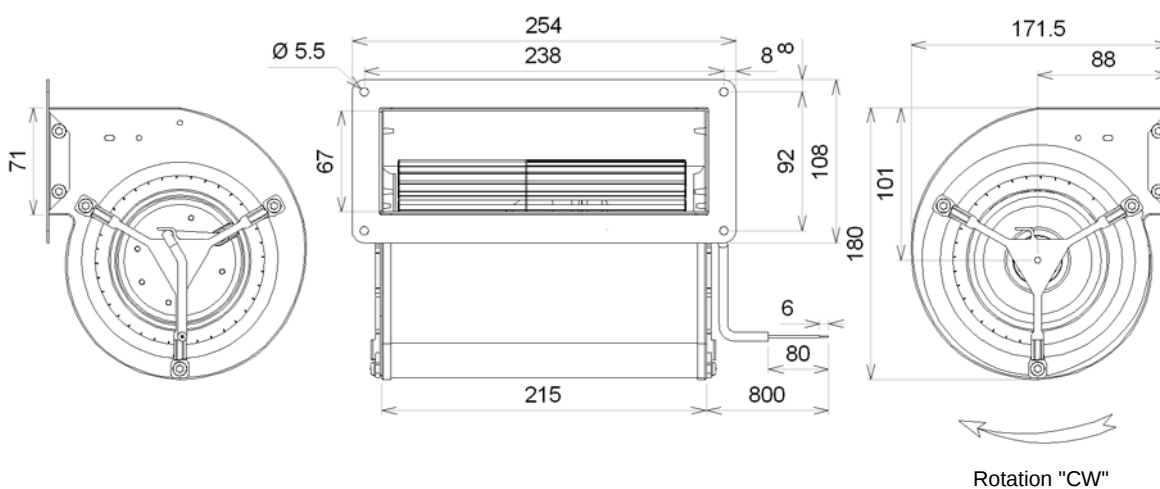

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Scroll housing : black paint
- Galvanized steel impeller
- UL approved motor

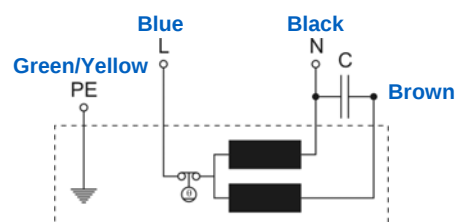

Capacitor for 50Hz	Capacitor for 60Hz	Zinc Coated
19224-0	19224-0	21236-a