
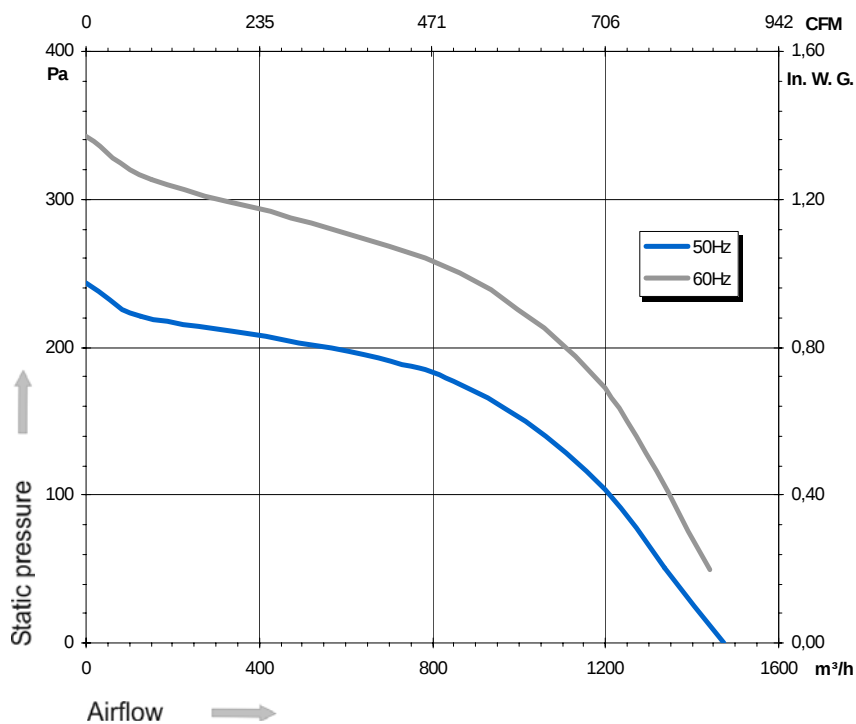

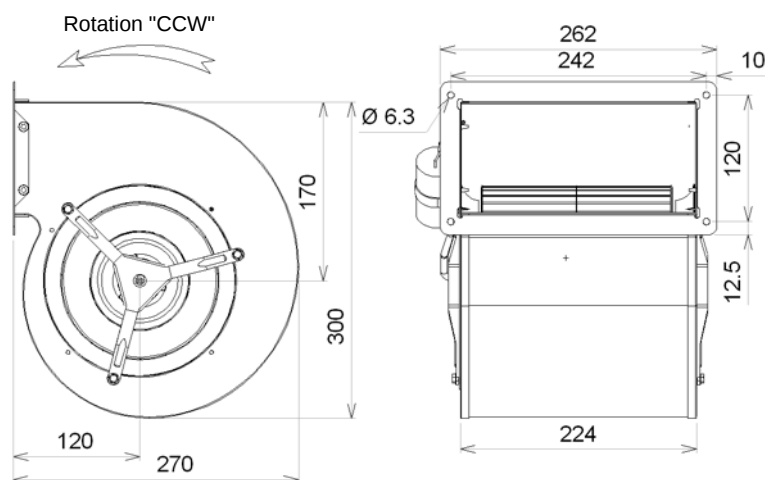



Ind. b - Revision : 04-2005

4GDF65 180x180L P/N R10-05

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	251	1,11	6,0	1 475	1 170	58	L	-20°C / +50°C
230	60	309	1,36	6,0	1 440	1 255	58	L	-20°C / +50°C

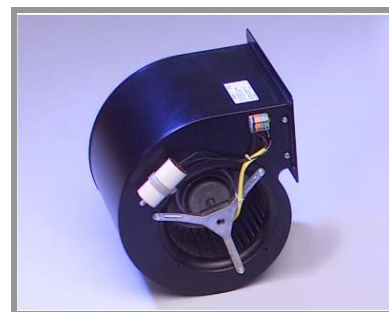

- Ball bearing
- Class F, thermally protected
- IP54 protection
- G2.5 balancing
- Scroll housing : black paint
- Galvanized steel impeller
- Capacitor fixed on the scroll and wired to a WAGO Connector

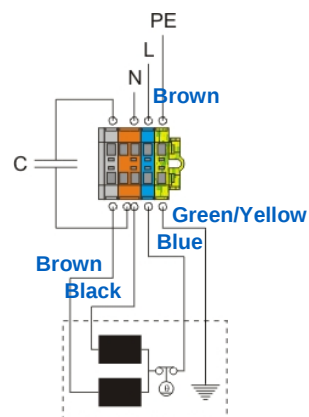

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.